



WOOD


Every style, its own wood essenced

From the most traditional to the most exclusive essences, as well as new interpretations, using unexpected colors and design decorations.

Kamron wood can express every living style bringing warmth and naturalness to residential and commercial venues. A complete range designed to meet every style and use need.





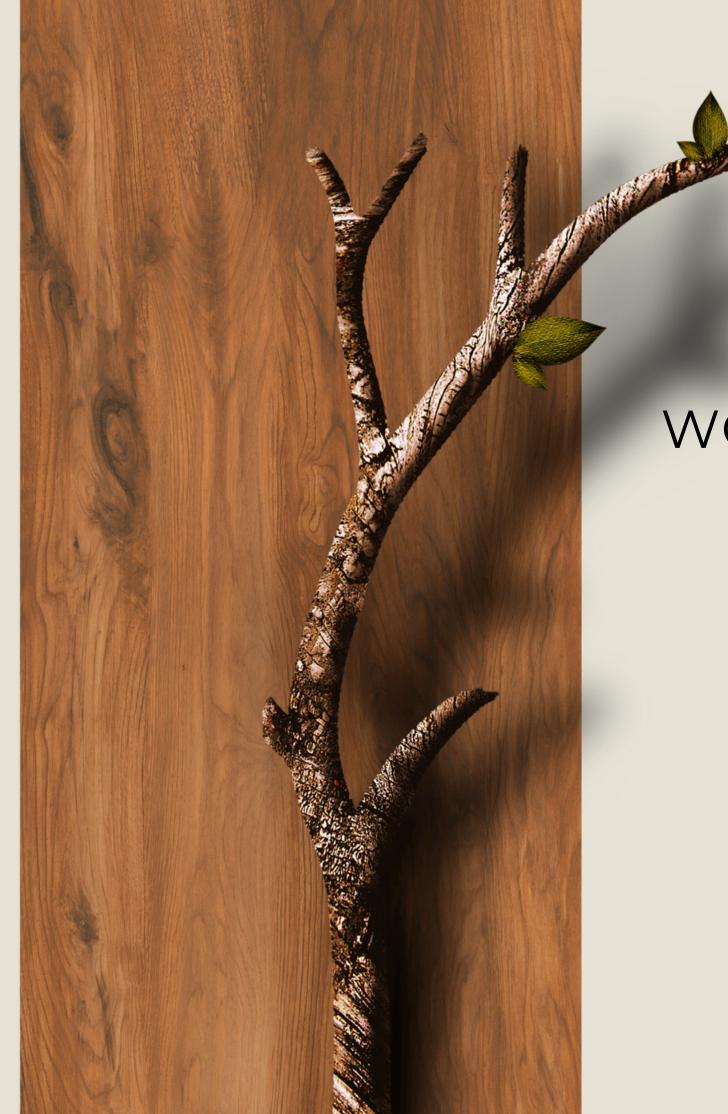

BARK WOOD BROWN


600X1200 MM





EG - BARK WOOD BROWN
SIZE: 600X1200 MM



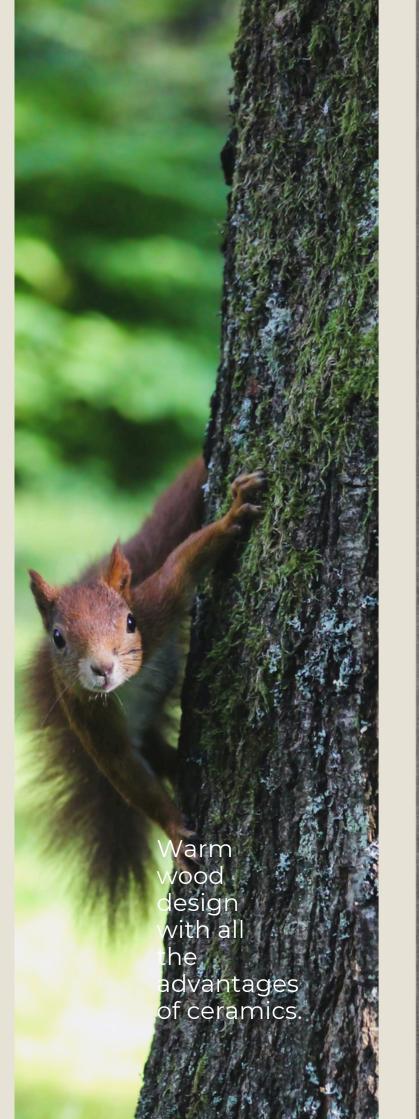



COSTER WOOD GREY


600X1200 MM






EG - COSTER WOOD GREY
SIZE: 600X1200 MM



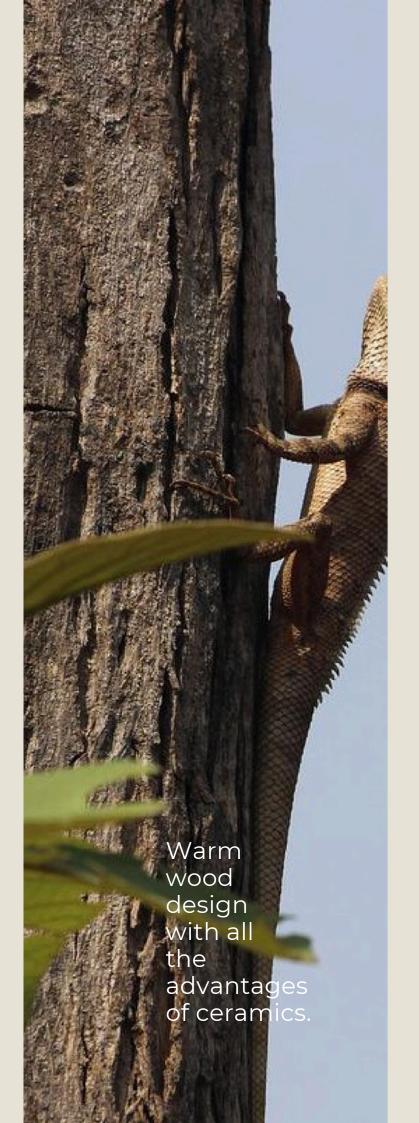

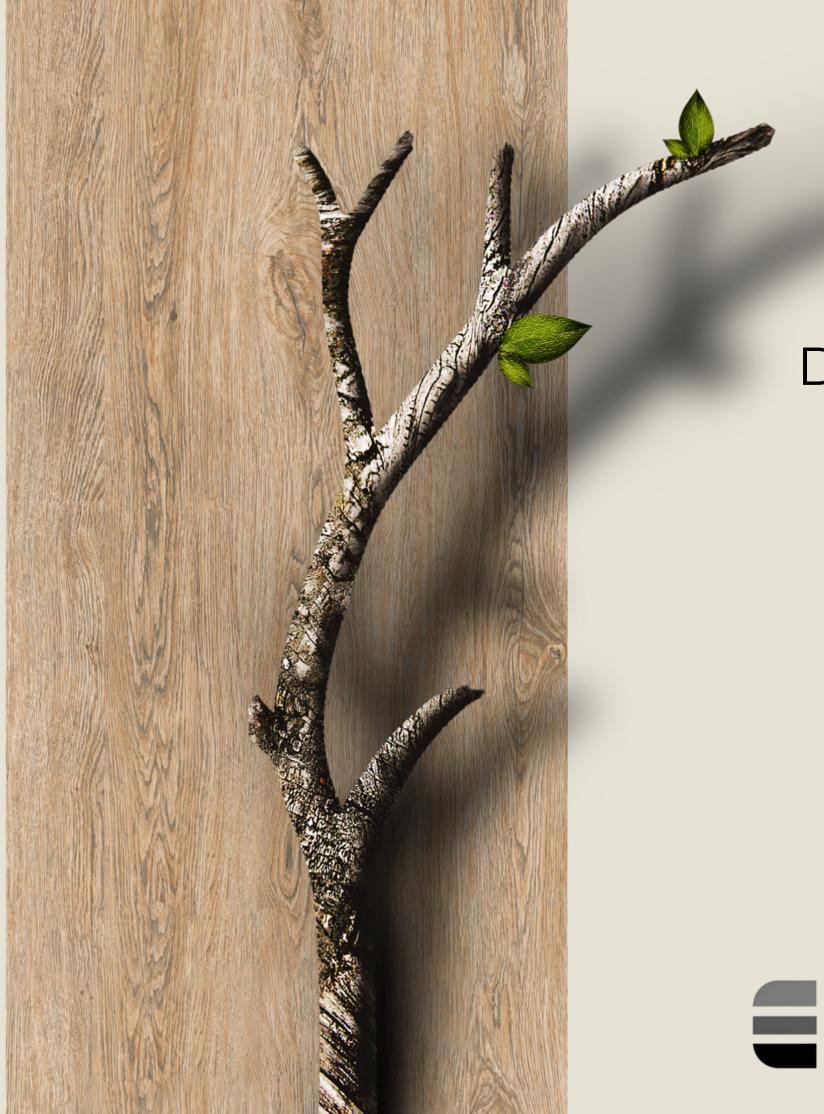

DOUGLAS OAK


600X1200 MM






EG - DOUGLAS OAK SIZE: 600X1200 MM



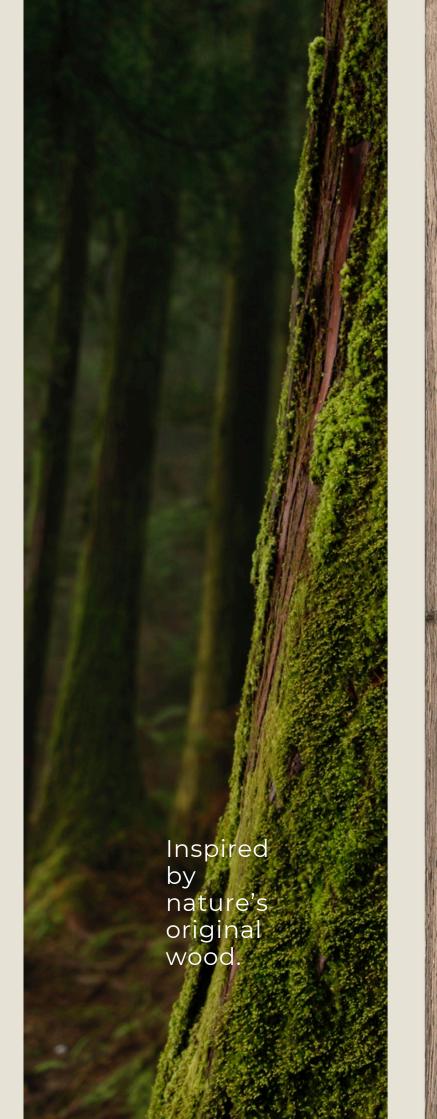

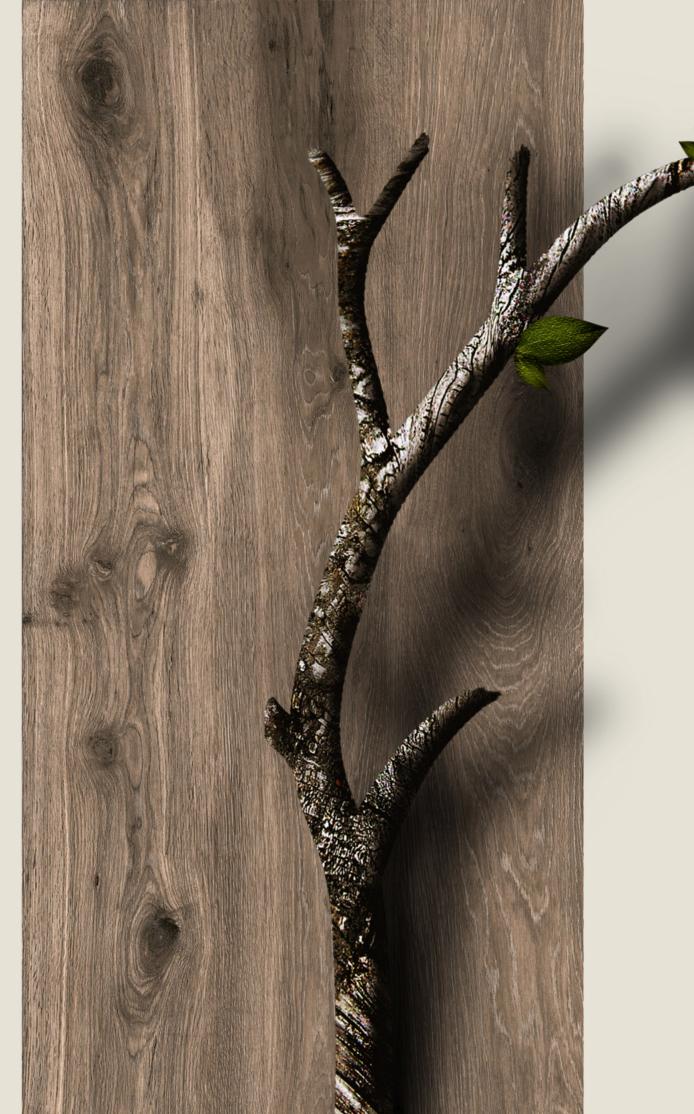

AMAZON WOOD DARK

600X1200 MM








EG - AMAZON WOOD DARK SIZE: 600X1200 MM



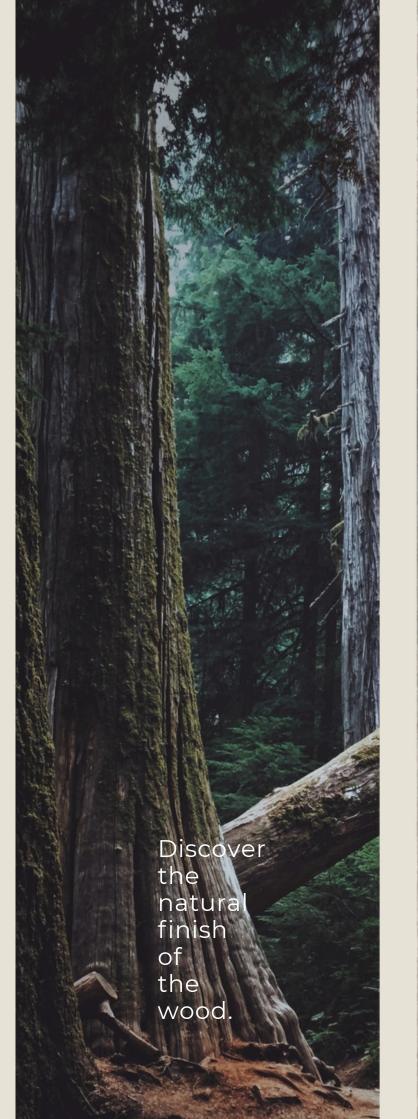



AMAZON WOOD

600X1200 MM






EG - AMAZON WOOD
SIZE: 600X1200 MM

FINISH: WOODEN





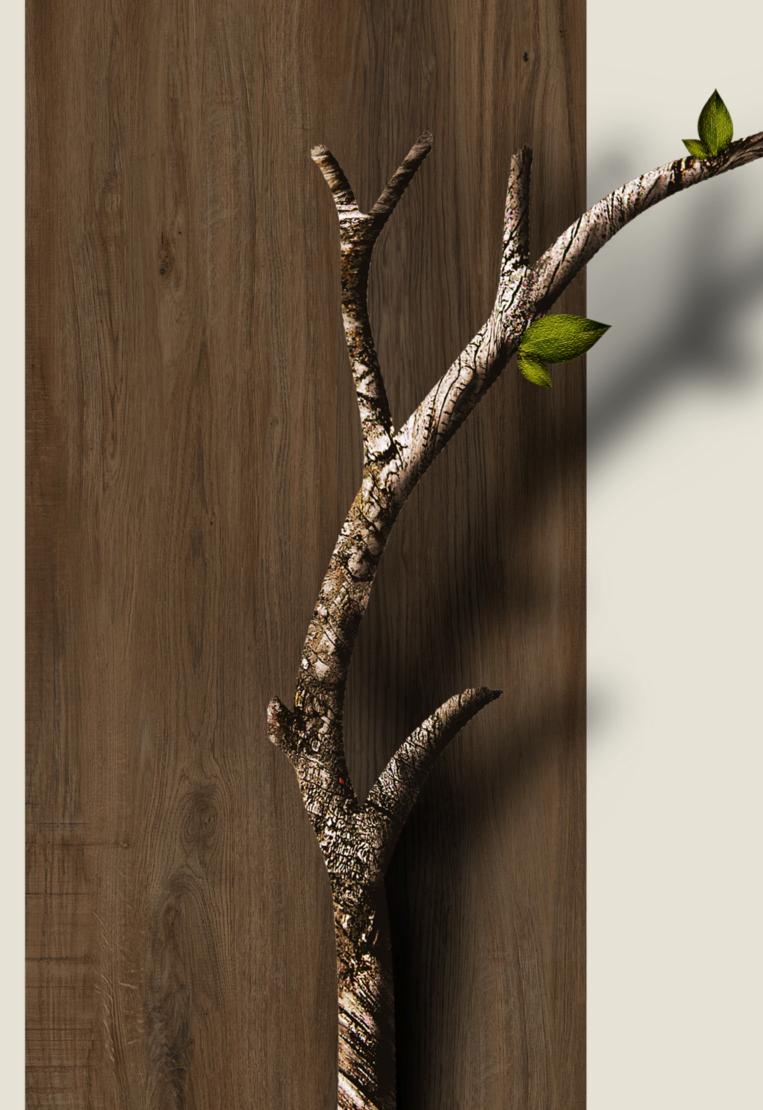

HARD WOOD

600X1200 MM






EG - HARD WOOD
SIZE: 600X1200 MM





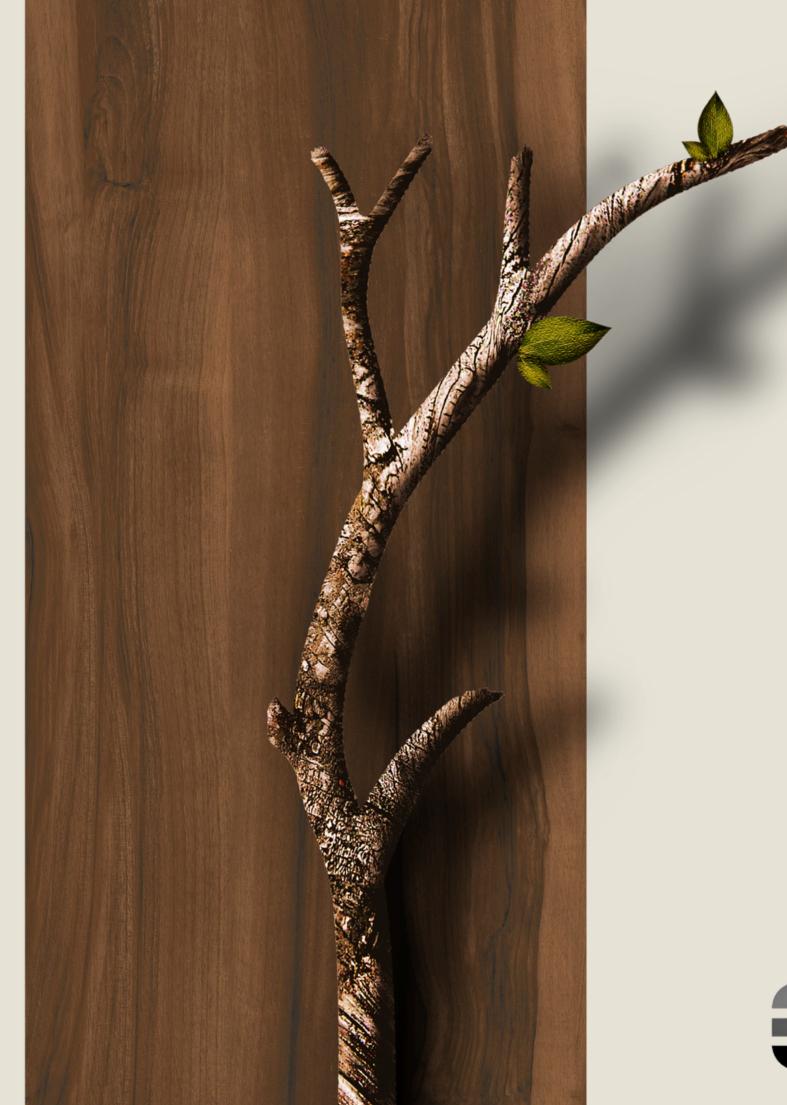

KERRY WOOD

600X1200 MM






EG - KERRY WOOD
SIZE: 600X1200 MM

FINISH: WOODEN





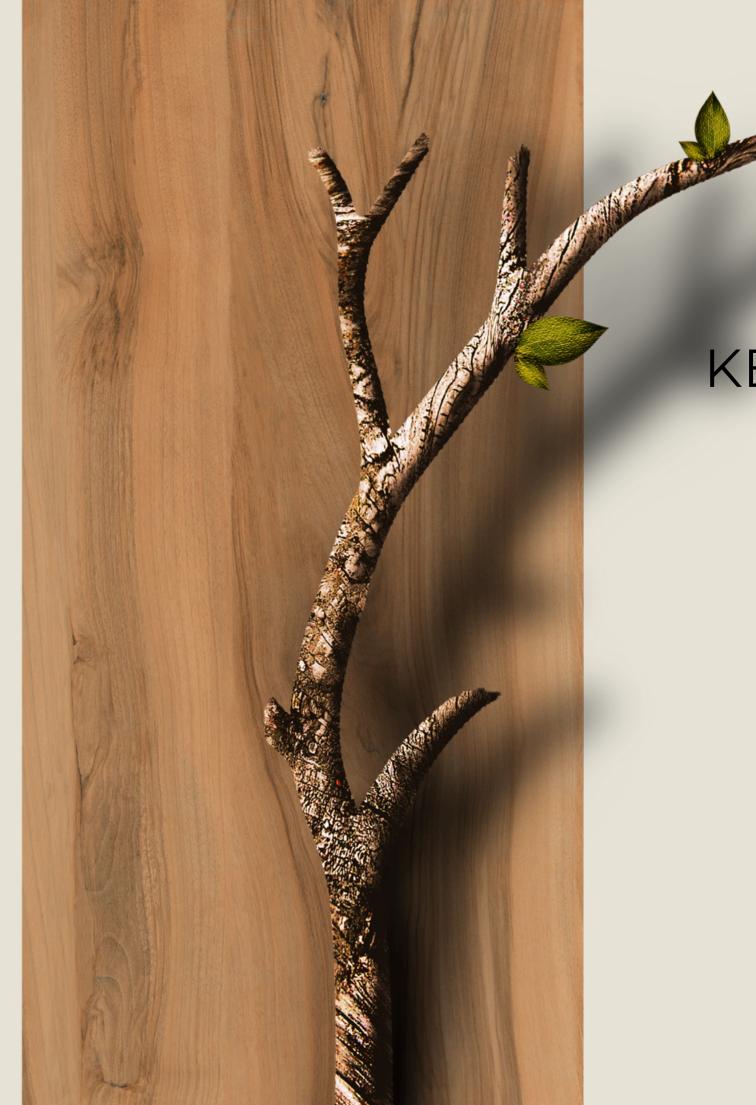

KERRY WOOD NATURAL

600X1200 MM






EG - KERRY WOOD NATURAL SIZE: 600X1200 MM






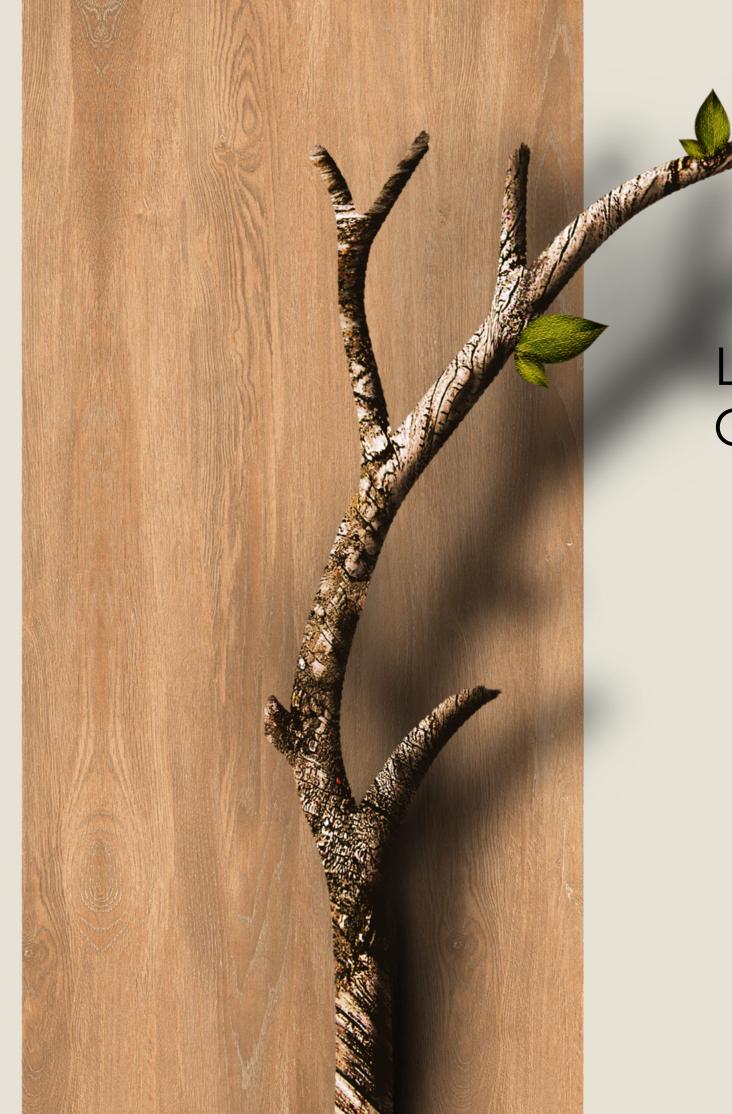

LINER WOOD
CREMA


600X1200 MM



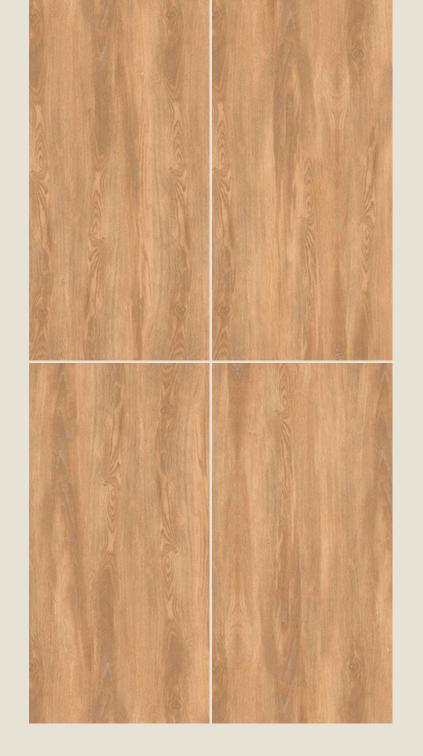

EG - LINER WOOD CREMA
SIZE: 600X1200 MM



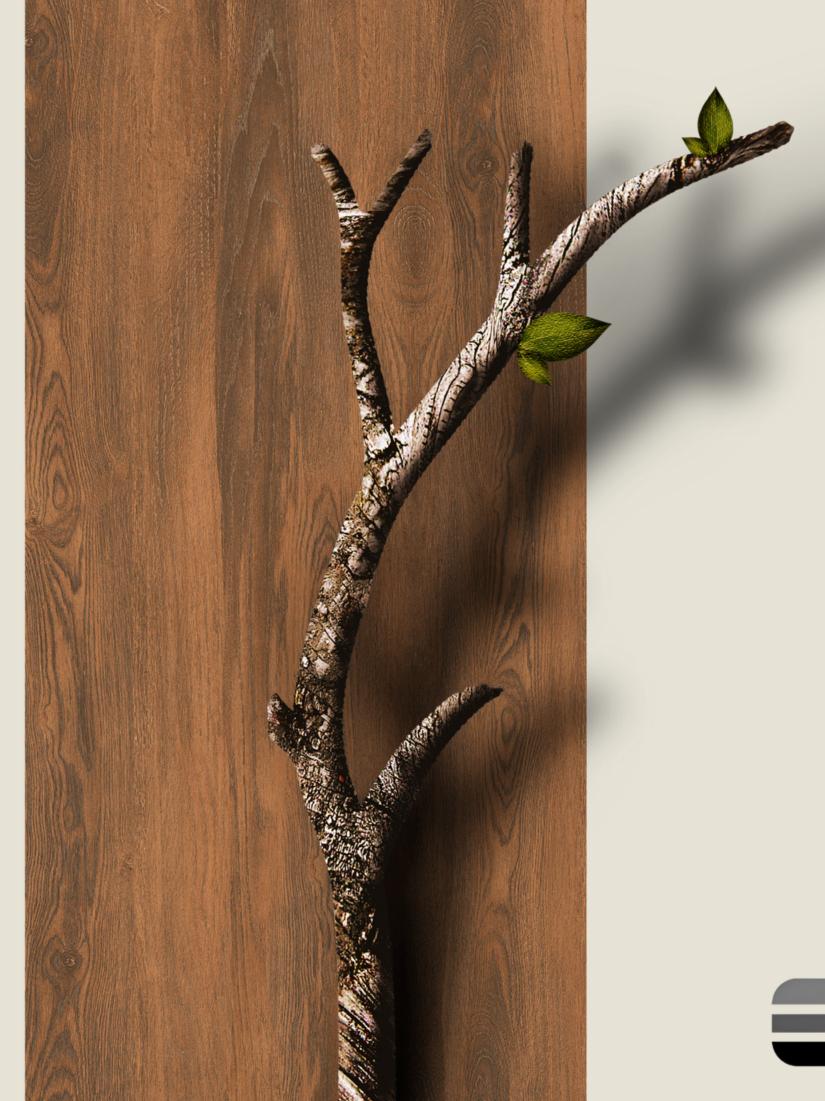

LINER WOOD

600X1200 MM

WOODEN SERIES

Natural wood veins and textures.





EG - LINER WOOD
SIZE: 600X1200 MM







600X1200 MM






EG - METAL OXIDO CREMA SIZE: 600X1200 MM

FINISH: WOODEN





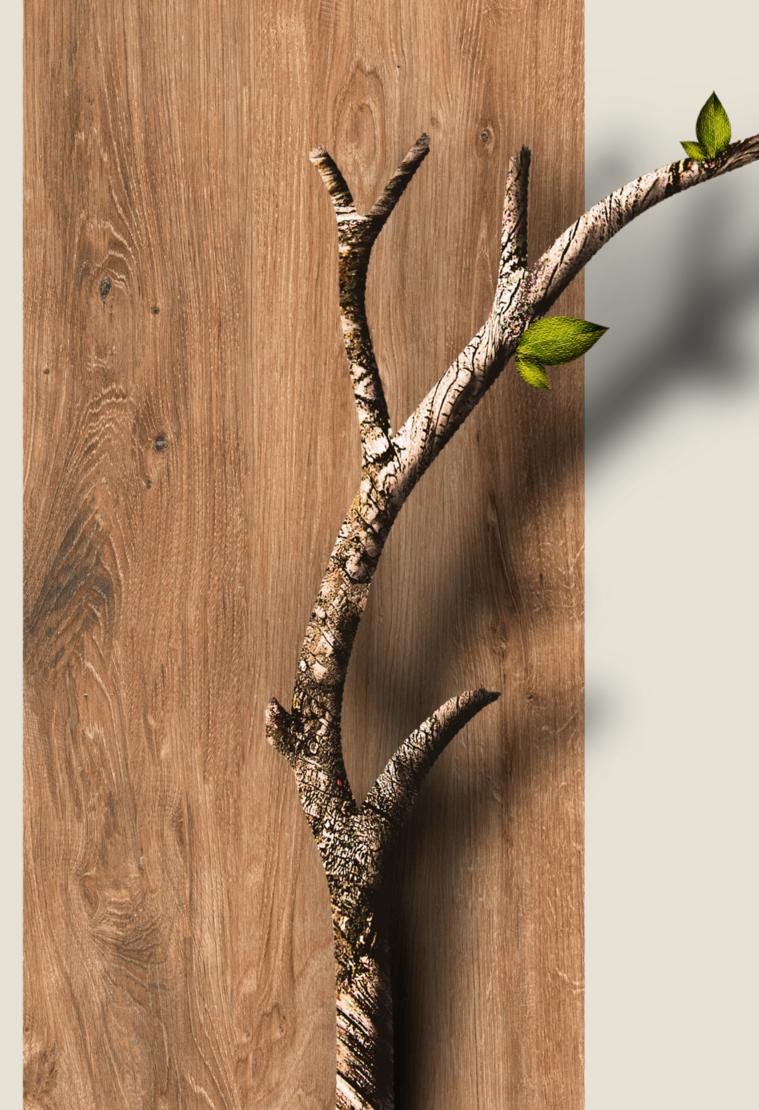

PINE WOOD BROWN

600X1200 MM






EG - PINE WOOD BROWN
SIZE: 600X1200 MM





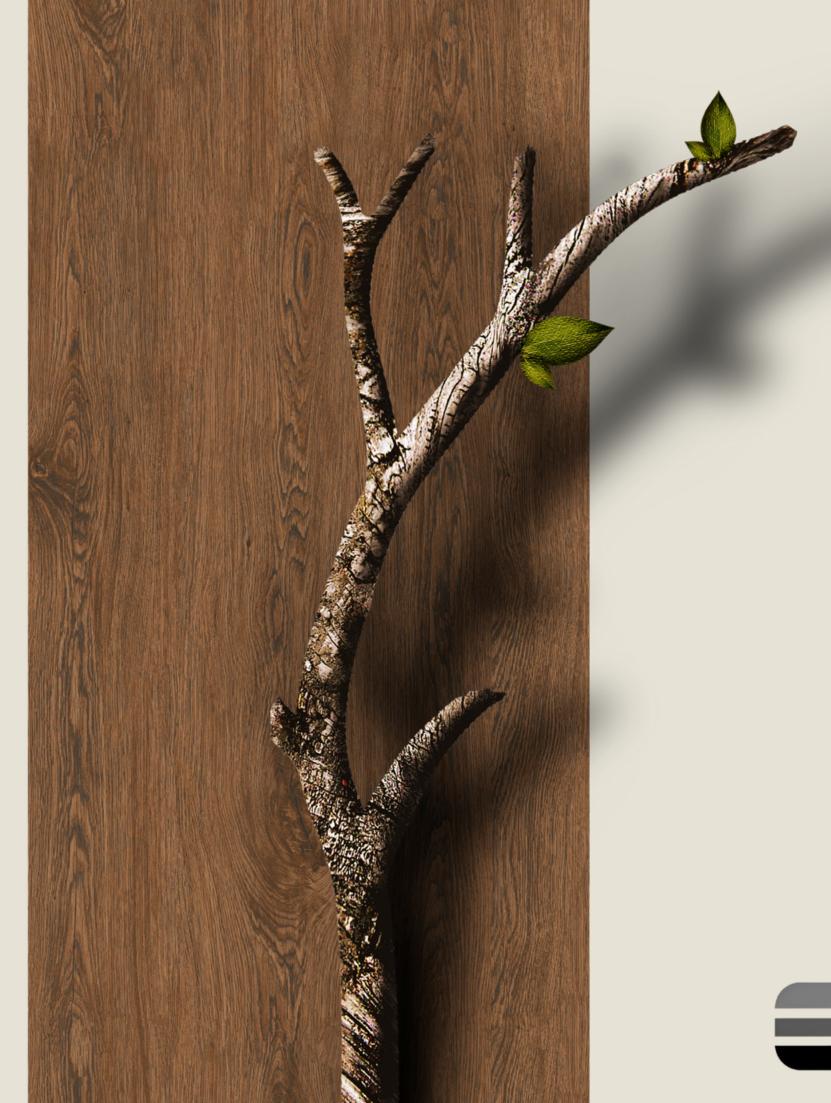


RUSSAL WOOD

600X1200 MM






EG - RUSSAL WOOD
SIZE: 600X1200 MM

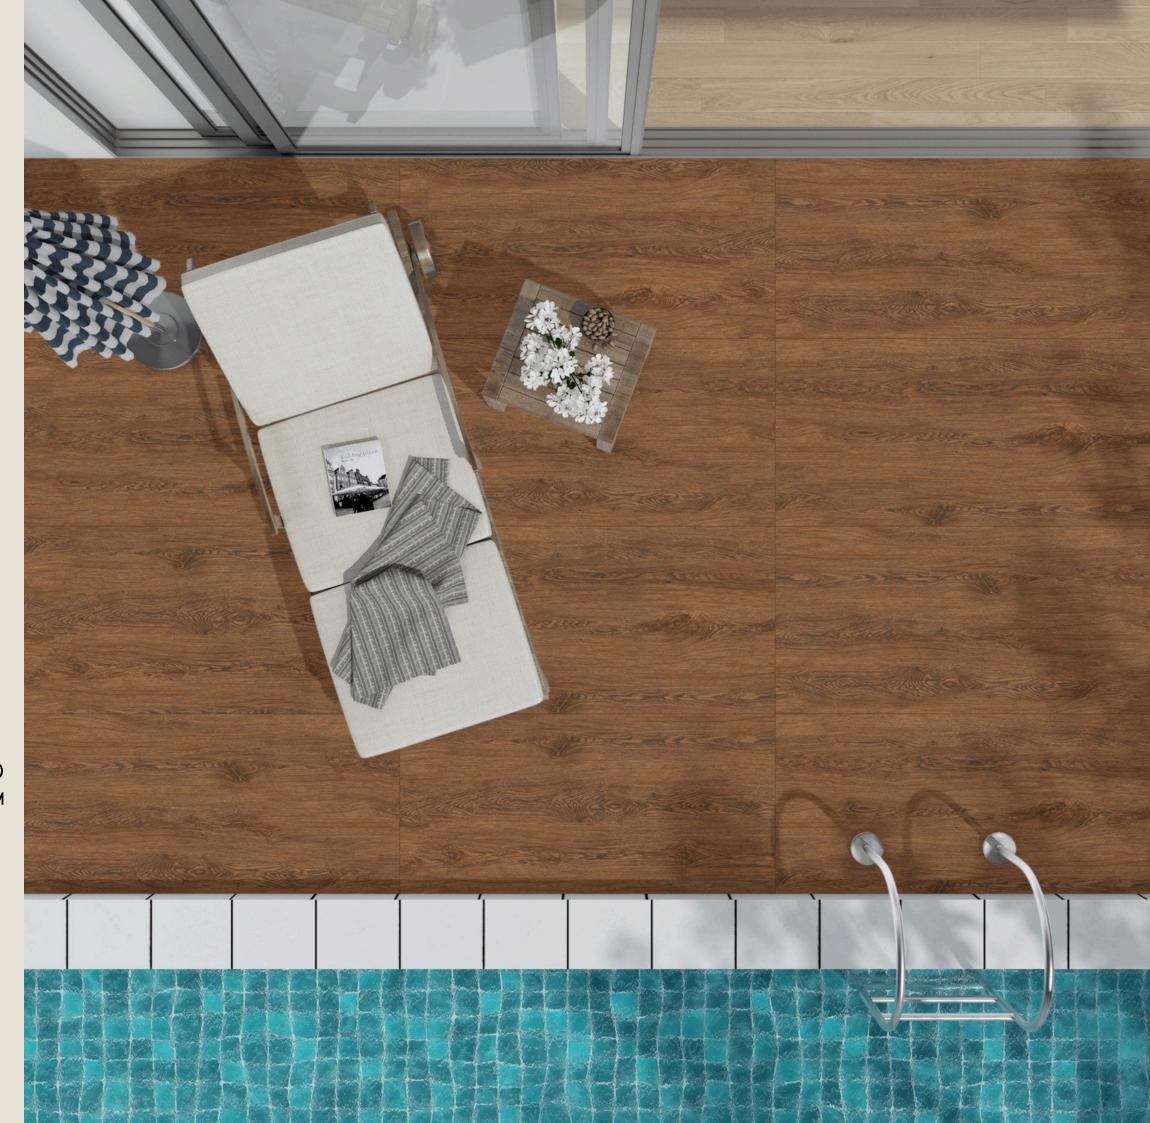



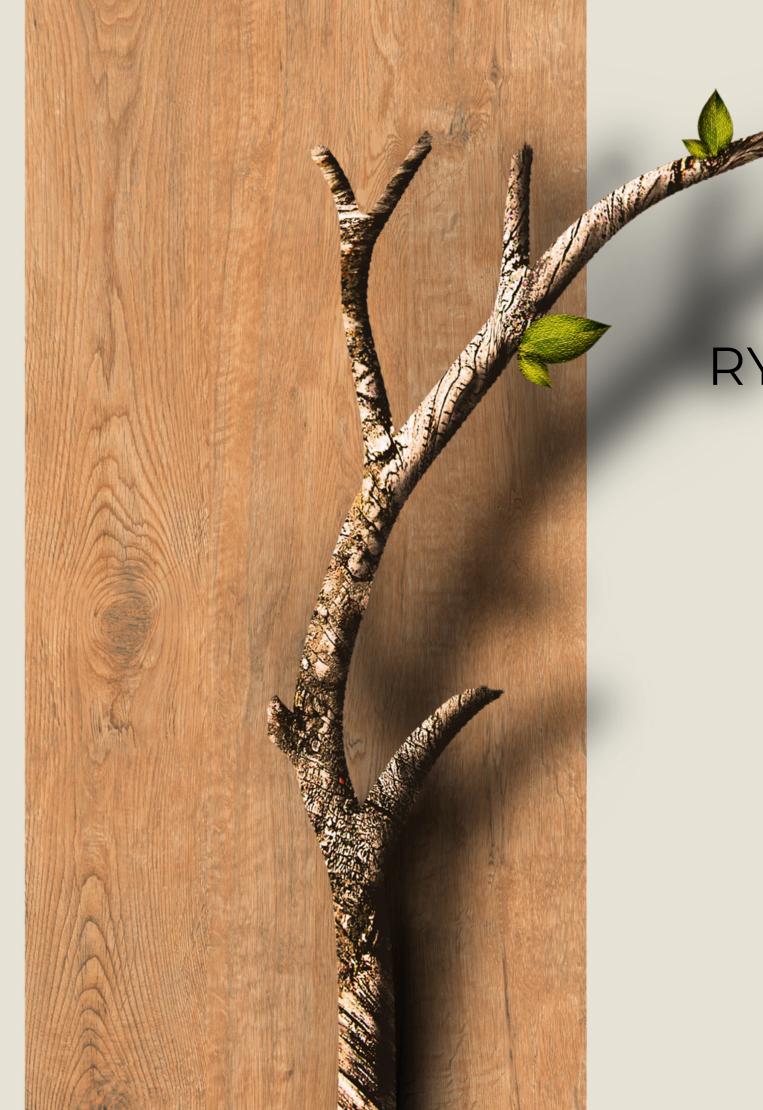

RYKER WOOD BROWN

600X1200 MM





EG - RYKER WOOD BROWN SIZE: 600X1200 MM





TECHNICAL SPECIFICATION

PACKING DETAILS

ı	SR. NO	PRODUCT	NOMINAL SIZE	TILES PER BOX	COVERAGE AREA
	1	VITRIFIED TILES	600x1200mm	2	1.44 Sq. Mtr.

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN 14411 GROUP Bla	MEAN VALUE OF POLISHED GVT	MEAN VALUE OF RUSTIC GVT	TEST METHOD
REGULATORY PROPERTIES				
Deviation in length & width	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Deviation in thickness	±5.0 %	±4.0 %	±4.0 %	ISO-10545-2
Straightness in side	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Rectangularity	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Surface flatness	±0.5 %	±0.2 %	±0.2 %	ISO-10545-2
Color difference	Unaltered	No change	No change	ISO-10545-16
Glossiness	As per mfg	Min 90%	Min 4%	GLOSSOMETER
STRUCTURAL PROPERTIES				
Water absorption	< 0.50 %	< 0.20 %	< 0.20 %	ISO-10545-3
Apparent density	> 2.0 g/cc	>2.10 g/cc	>2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROP	PERTIES			
Modulus of rupture	Min. 35 N/mm ²	Min. 40 N/mm ²	Min. 40 N/mm ²	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 2000 N	Min. 2000 N	ISO-10545-4
Impact resistance	As per mfg.	Min. 0.55	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PROP	PERTIES			
Surface abrasion resistance	As per mfg.	Min. Class-3	Min. Class-4	ISO-10545-7
MOH's hardness	As per mfg.	Min. 4	Min. 5	EN 101
THERMO HYGROMETRIC PRO	PERTIES			
Frost resistance	No damage	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	No damage	ISO-10545-9
Moisture expansion	Nil	Nil	Nil	ISO-10545-10
Thermal expansion (COE)	Max. 9.0 x 10 ⁻⁶	Max. 6.5x10 ⁻⁶	Max. 6.5 x 10 ⁻⁶	ISO-10545-8
Crazing resistance	As per mfg.	Min. 10 Cycle	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES				
Chemical resistance	No damage	No damage	No damage	ISO-10545-13
Stain resistance	Resistant	Resistant	Resistant	ISO-10545-14
SAFETY PROPERTIES				
Slip resistance	As per mfg.	>0.40	>0.40	ISO-10545-17
Fire resistance	As per mfg.	Fire proof	Fire proof	N. A.
Lead & Cadmium given off by glazed tiles	As per mfg.	Does not yield Pb & Cd	Does not yield Pb & Cd	ISO-10545-15

